


Premium Marquees, New Zealand Engineered and Certified

# The Hocker Marquee



Clear-span width	6m
Eave height	2.4m
Ridge height	3.48m
Roof pitch	20°
Bay distance	3m
Roof fixing	Bar tensioning
Main profile	89x48x3.0mm (2-channel)
Wind loading	80 km/hour, 0.3 kn/m <sup>2</sup>
Eave Connection	Hot-dip Galvanized steel insert
Framework material	Hard pressed extruded aluminium 6061/T6 (15HW)
Cover Material	PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2, CFM. 750-900 g/m <sup>2</sup> , waterproof

Size	6 m (comes in 3 metres segments, 6x3m bays: 6x3, 6x6, 6x9, etc.)
Colours	White, if not specified
Number of guests	Up to 75

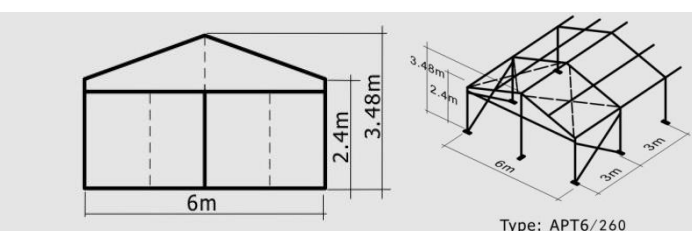

Supplementary Accessories and Services (optional):

- staging packages
- lighting packages
- flooring systems
- decorations
- event hire
- event management
- branding solutions