


Premium Marquees, New Zealand Engineered and Certified

The Super Elite Marquee



Clear-span width	20m
Eave height	3.87m
Ridge height	8.8 m
Roof pitch	25°
Bay distance	5m
Roof fixing	Bar tensioning
Main profile	204x120x4mm (4-channel)
Wind loading	100 km/hour, 0.5 kn/m ²
Eave Connection	Hot-dip Galvanized steel insert
Framework material	Hard pressed extruded aluminium 6061/T6 (15HW)
Cover Material	PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2, CFM. 750-900 g/m ² , waterproof

Size	20 m (comes in 5 metres segments, 20x5m bays: 20x5, 20x10, 20x15, etc.)
Colours	Alternate white and clear roof covers. Has got a clear half dome.
Number of guests	Up to 1000

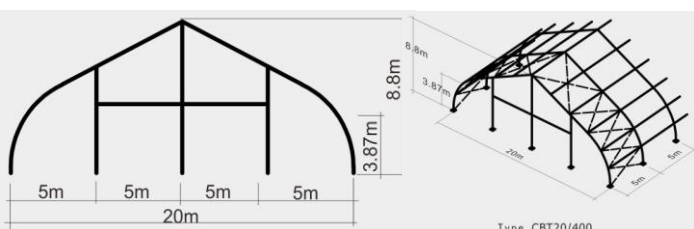

Supplementary Accessories and Services (optional):

- staging packages
- lighting packages
- flooring systems
- decorations
- event hire
- event management
- branding solutions